


# ENERGIZER 528-4F

**6V**



## Industry Standard Dimensions

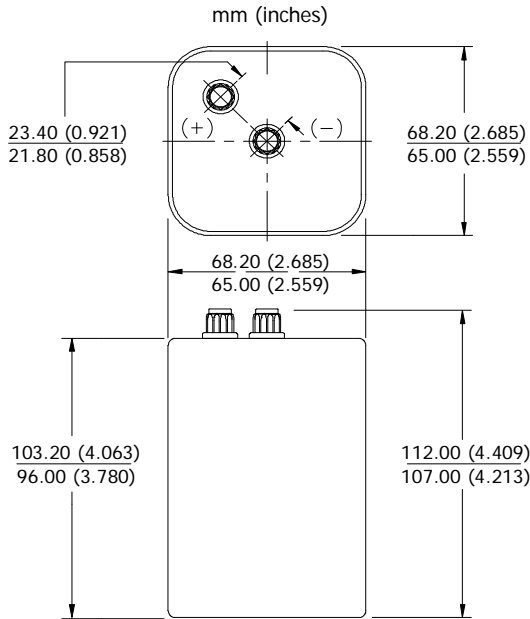


This battery shall pass freely through a cylindrical tube 82.6 (3.250) diameter

## Specifications



<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	ANSI-908A, IEC-4R25Y
<b>Nominal Voltage:</b>	6.0 volts
<b>Operating Temp:</b>	-18°C to 55°C (0°F to 130°F)
<b>Typical Weight:</b>	885 grams (31.3 oz.)
<b>Typical Volume:</b>	440.4 cubic centimeters (26.9 cubic inch)
<b>Jacket:</b>	Metal
<b>Cells:</b>	Four 3-361 in series
<b>Terminal:</b>	Screw Post

## Milliamp-Hours Capacity

Continuous discharge to 3.2 volts at 21°C

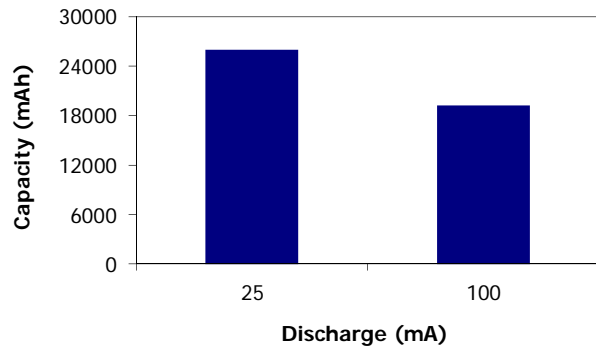

## Industry Standard Tests (21°C)

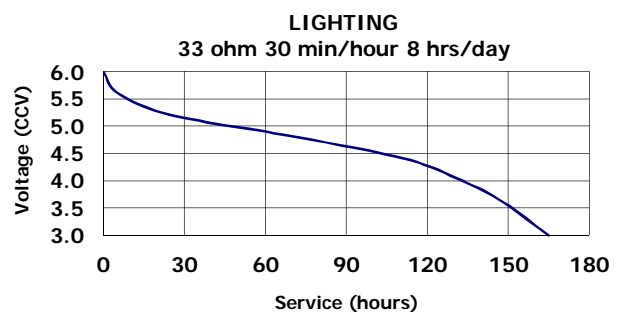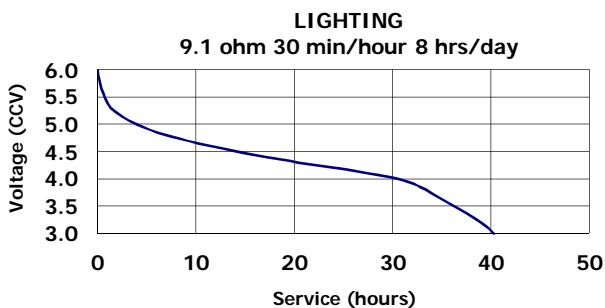

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.